


STANLEY®

FATMAX®

AIR COMPRESSORS 2017



A full-page photograph of a male mechanic in a red and black jumpsuit working on a car tire. The car is elevated on a lift, and the mechanic is looking at the tire. The background shows a garage with various tools and equipment. A yellow diagonal banner is in the bottom left corner.

THE RANGE OF STANLEY FATMAX COMPRESSORS

is dedicated for the most demanding
hobby workers, handicraft workers
and professionals alike.

It stands out on the market for its innovative
technical solutions and complete reliability.

INDEX

2



AIR COMPRESSOR COMPONENTS

12



DIRECT DRIVEN LUBRICATED COMPRESSORS

4



PACKAGING

14



**DIRECT DRIVEN LUBRICATED TWIN
"V" CYLINDER COMPRESSORS**

5



DIRECT DRIVEN OILLESS COMPRESSORS

16



BELT DRIVEN SINGLE-STAGE COMPRESSORS

8



FUTURA RANGE

18



BELT DRIVEN TWO-STAGE COMPRESSORS

AIR COMPRESSOR COMPONENTS

THE MAIN PARTS OF A COMPRESSOR



A AIR COMPRESSOR PUMP

This is the main part of an air compressor. Inside the compressor pump, one or two pistons compress the air taken from the environment and deliver it to the receiver.

G PRESSURE SWITCH

Controls the compressor by switching the machine off when the pressure inside the receiver reaches the default value (for example 8 or 10 bar) and restarts the compressor when the compressed air is used and the pressure drops to a pre-set value.

B AIR DELIVERY PIPE

Connects the compressor pump to the receiver, thus, the compressed air is delivered from the compressor pump to the receiver.

H PRESSURE REDUCER

Makes it possible to reduce the pressure of the air discharged from the receiver and to adjust it according to the application.

C AIR RECEIVER

The vessel which stores the accumulated compressed air ready for use. It is made of extra thick steel and it is always tested to a higher pressure than the working pressure of the compressor. Its function is to compensate the difference between the amount of air produced by the compressor pump and the one required by the user. The use of a larger receiver reduces the number of start-ups required by the compressor.

I SAFETY VALVE

Prevents the pressure inside the receiver from exceeding the safety values in case of the pressure switch failure.

D SHROUD/BELT-GUARD

Protects against accidental contact with the moving parts and directs the cooling air produced by the flywheel or directly by the motor fan towards the areas where the heat is generated.

J DRAIN VALVE

Makes it possible to drain all the water that forms in the receiver due to the condensation of the water vapor contained in the compressed air.

E ELECTRIC MOTOR

Transmits movement to the air compressor pump either directly (direct driven compressors) or through a belt (belt-driven compressors).

K COMPRESSED AIR OUTLET

Used to connect the hose that carries the compressed air to the requested air-powered tool.

F GAUGES

One gauge indicates the pressure of the air inside the air receiver and the other one indicates the outlet that is pressure.

L NON RETURN VALVE

The one way valve that allows the air to flow in one direction only, from the compressor pump to the air receiver.

PACKAGING

STANLEY PACKAGING HIGHLIGHTS

Each model is packed in a coloured box (models above 50 litres in a brown box with colour poster) that uses appealing graphics as well as simple and clear images to illustrate the content and its array of applications, helping the consumer choose the right product.



Pictograms of the main technical characteristics.

Symbols that help the buyer select the right compressor for the intended use.

The same symbols are printed on the packaging of accessories and indicate which compressor is suitable for that tools.




Representations of situations of use.

Product photos in the foreground.

An example: a WHITE symbol on the box of a compressor means that this machine is compatible with all pneumatic tools that have the same symbol on their packaging.

SYMBOL / USE



When printed on the packaging, this symbol indicates that the compressor is suitable for:



BLOWING

INFLATING


AIRBRUSH

STAPLING
NAILING



CLEANING

SPRAYING



2 symbols allow for the following applications:



BLOWING

INFLATING

AIRBRUSH

STAPLING
NAILING




CLEANING

SPRAYING

PROF.SPRAYING

SCREWING



3 symbols allow for a broad field of applications:



BLOWING

INFLATING

AIRBRUSH

STAPLING
NAILING



CLEANING

SPRAYING

PROF.SPRAYING

SCREWING



WASHING

CHISELING

POLISHING

GRINDING

DIRECT DRIVEN OILLESS COMPRESSORS

DN 230/10/50V



- Oilless vertical 50-litre compact maintenance-free compressor.
- Ideal for all hobby applications.
- Complete and compact control panel.
- Large handle makes it easy to carry.
- Useful wheels make it easy to move.
- Storage compartment for accessories built into the shroud.
- Comfortable front tool hooks.



Accessories not included.

50-litre tank.

Front rubber feet for enhanced stability during use.



Name	Code	Stanley FatMax Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions LxPxH	Ean code
DN 200/10/30V	81172005TF501	FMXCM0001E	OL195	30	1,5/1,1	1	10/145	NO	3400	180/6,35	230/50	20,9/46	365x325x785	8016738763843
DN 230/10/50V	81172105TF502	FMXCM0002E	OL227	50	2/1,5	1	10/145	NO	3400	222/7,8	230/50	25/55,1	365x340x865	8016738763850

DIRECT DRIVEN OILLESS COMPRESSORS


CONTROL PANEL

All models featured on these pages have a control panel that contains all the devices for the machine operation.



- These oilless compressors feature an original design and meet the needs of the hobby worker, whether an amateur or a skilled handyman looking for a specific product.
- The large handle and upright tank ensure easy handling and practical transport and storage.
- The shroud mounted panel features a full set of controls for quick and easy use.
- Heavy-duty plastic shrouds protect the internal mechanical parts.
- Feature a practical tools hook.

TAB 200/10/24V

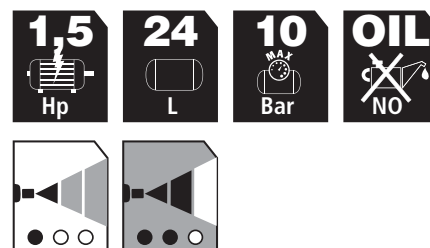


DIRECT DRIVEN OILLESS COMPRESSORS



Practical tools hook.

Accessories not included.

TAB 200/10/30V





30-litre tank.



Also available with wheels (TAB 200/10/30VW).

TAB 230/10/50VW



50-litre tank.

Name	Code	Stanley FatMax Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions LxPxA	Ean code
TAB 200/10/24V	8117230STF503	FMXCM0021E	OL195	24	1,5/1,1	1	10/145	NO	3400	180/6,35	230/50	17,5/38,6	340x340x635	8016738763867
TAB 200/10/30V	8117240STF504	FMXCM0022E	OL195	30	1,5/1,1	1	10/145	NO	3400	180/6,35	230/50	21/46,2	340x340x770	8016738763874
TAB 200/10/30VW	8117250STF505	FMXCM0023E	OL195	30	1,5/1,1	1	10/145	NO	3400	180/6,35	230/50	25,3/55,8	340x340x712	8016738763881
TAB 230/10/50VW	8117260STF506	FMXCM0024E	OL227	50	2/1,5	1	10/145	NO	3400	222/7,8	230/50	27,5/60,6	340x340x878	8016738763898

FUTURA RANGE

HIGHLIGHTS

LONG LIFE AS A LUBRICATED PUMP, EASY MAINTENANCE AS AN OILLESS PUMP.

All FUTURA compressors feature a permanently lubricated pump that never requires any oil.



Innovative design.

Start-up at extremely low temperatures (-20°)
and low voltage, only 150 Volt.

Pressure switch
built-in for a more
compact design.



Lighter pump compared
to traditional designs.

NEW

GAMMA FUTURA

HY 227/10/5



Additional features:

- Fully pump protected thanks to steel casing.
- Lightweight and compact 5-litre tank.
- Large, easy to read gauges.
- Rubber feet for enhanced stability during use.



Easy to transport thanks to the comfortable handle.

Tap ball valve with enlarged passage to avoid blocking and obstructions.

HY 227/8/6E



Additional features:

- Handle built into the crankcase for easy transport.
- Lightweight 6-litre tank.
- Rubber feet ensure excellent stability.



NEW

HY 227/10/12




This model has the same advantages of HY 227/10/5 with a 12-litre tank.



Name	Code	Stanley FatMax Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions LxPxH	Ean code
HY 227/10/5	HYBR404STF507	FMXCM0041E	HY227	5	2/1,5	1	10/145	YES	3400	222/7,8	230/50	14/30,8	410x360x325	8016738763904
HY 227/8/6E	HYBE404STF508	FMXCM0042E	HY227	6	2/1,5	1	8/116	YES	3400	222/7,8	230/50	11,4/25,1	440x230x425	8016738763911
HY 227/10/12	HYBD404STF509	FMXCM0043E	HY227	12	2/1,5	1	10/145	YES	3400	222/7,8	230/50	16/35,2	520x255x470	8016738763928


FUTURA RANGE

HY 227/10/24VE




Additional features:

- Handle built into the crankcase for easy transport.
- Compact vertical 24-litre tank.
- Simple, user friendly controls.
- Rubber feet for enhanced stability during use.




HY 227/10/24V



Additional features:

- Fully pump protected thanks to steel casing.
- Sturdy handle with rubber grip ensures easy handling.
- Compact vertical 24-litre tank.
- Large, easy to read gauges.
- Rubber feet for enhanced stability during use.



On / Off switch.



24-litre tank.




Name	Code	Stanley FatMax Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions LxPxA	Ean code
HY 227/10/24VE	HYCE404STF510	FMXCM0044E	HY227	24	2/1,5	1	10/145	YES	3400	222/7,8	230/50	19/41,9	315x315x700	8016738763935
HY 227/10/24V	HYCV404STF511	FMXCM0045E	HY227	24	2/1,5	1	10/145	YES	3400	222/7,8	230/50	20,8/45,8	315x315x700	8016738763942

FUTURA RANGE

HY 227/10/30V




This model has the same advantages of HY 227/10/24V with a 30-litre tank.



HY 227/10/50V



This model has the same advantages of HY 227/10/24V with a 50-litre tank.




Name	Code	Stanley FatMax Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions LxPxA	Ean code
HY 227/10/30V	HYCT404STF512	FMXCM0046E	HY227	30	2/1,5	1	10/145	YES	3400	222/7,8	230/50	26/57,3	325x315x810	8016738763959
HY 227/10/50V	HYDV404STF513	FMXCM0047E	HY227	50	2/1,5	1	10/145	YES	3400	222/7,8	230/50	28/61,7	340x340x870	8016738763966



DIRECT DRIVEN LUBRICATED COMPRESSORS

New lubricated compressors with 2 Hp and 2,5 Hp pump ideal for all hobby activities and enriched with technical solutions that simplify use.

D 211/8/24S



D 250/10/50S



Name	Code	Stanley FatMax Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions LxPxH	Ean code
D 211/8/24S	FCCC404STF514	FMXCM0061E	FC2	24	2/1,5	1	8/116	YES	2850	222/7,8	230/50	24,9/54,9	570x255x590	8016738763973
D 250/10/24S	FCCC4G4STF515	FMXCM0062E	FC2,5	24	2,5/1,8	1	10/145	YES	2850	240/8,5	230/50	25,5/56,2	570x255x590	8016738763980
D 211/8/50S	FCDV404STF516	FMXCM0063E	FC2	50	2/1,5	1	8/116	YES	2850	222/7,8	230/50	37,7/83,1	830x325x665	8016738763997
D 250/10/50S	FCDV4G4STF517	FMXCM0064E	FC2,5	50	2,5/1,8	1	10/145	YES	2850	240/8,5	230/50	38,3/84,4	830x325x665	8016738764000

DIRECT DRIVEN LUBRICATED COMPRESSORS

- Sturdy, compact and 2.5 Hp makes it the perfect tool for the most demanding hobby worker.
- Comfortable rubber grip handle and large wheels for easy transport.
- Large gauges on the compressor for easier reading, pressure reducer knob with innovative "snap" adjustment mechanism.
- Dual compressed air output.

D 261/10/24

2.5
Hp

24
L

10
Bar

OIL
YES



Gauges on the compressor for easier reading.



Sturdy wheels ensure greater stability and handling.

Tap ball valve with enlarged passage to avoid blocking and obstructions.

D 261/10/50

2.5
Hp

50
L

10
Bar

OIL
YES



Powerful pump unit from 2,5 Hp.




Large fully tilted handle for easy transport.

Dual front feet offer greater stability.


Name	Code	Stanley FatMax Code	Pump	Tank	Power	Cylinder	Max Press.	Lubricated	RPM	Air displacement	Voltage Frequency	Gross weight	Box dimensions	Ean code
				L	Hp/kW	n°	bar/PSI			l/min./CFM	Volt/Hz	kg/lbs	LxPxH	
D 261/10/24	FCCC4G4STF518	FMXCM0065E	FC2,5	24	2,5/1,8	1	10/145	YES	2850	250/8,8	230/50	30,6/67,4	570x255x590	8016738764017
D 261/10/50	FCDV4G4STF519	FMXCM0066E	FC2,5	50	2,5/1,8	1	10/145	YES	2850	250/8,8	230/50	37,7/83,1	830x325x665	8016738764024

DIRECT DRIVEN LUBRICATED TWIN "V" CYLINDER COMPRESSORS

DV4 400/10/24P



- Power, low noise and compact size make this machine suitable for intense use in any environment.
- Direct driven two cylinder "V", 1450 RPM high performance and high reliability pump.
- Handle with extendible grip for extremely easy movement.



Compact machine with reduced size.

Front feet for enhanced stability during use.

Name	Code	Stanley FatMax Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions LxPxA	Ean code
DV4 400/10/24P	3BXA504STF020	FMXCM0081E	GVM	24	3/2,2	2	10/145	YES	1450	350/12,3	230/50	54/119	530x640x800	8016738702828

DIRECT DRIVEN LUBRICATED TWIN "V" CYLINDER COMPRESSORS

DV2 400/10/24P



- Heavy-duty compressor thanks to the aluminium pump with cast-iron cylinder for large air reserve.
- Stable and easy to transport, powerful and reliable.
- Handle with extendible grip for extremely easy movement.




DV2 400/10/50




- Professional two cylinder compressor with high performance and high reliability pump.
- Suitable for use with a wide range of pneumatic tools.
- Long handle for easy transportation.



DV2 400/10/100



Same characteristics as DV2 400/10/50 but with a 100-litre tank for a large air reserve.




Name	Code	Stanley FatMax Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions LxPxA	Ean code
DV2 400/10/24P	8119550STF521	FMXCM0082E	VDC	24	3/2,2	2	10/145	YES	2850	356/12,57	230/50	44,4/97,9	605x440x745	8016738702811
DV2 400/10/50	8119500STF522	FMXCM0083E	VDC	50	3/2,2	2	10/145	YES	2850	356/12,57	230/50	42,1/92,8	800x350x670	8016738703115
DV2 400/10/100	8119750STF023	FMXCM0084E	VDC	100	3/2,2	2	10/145	YES	2850	356/12,57	230/50	60/132	1010x390x840	8016738753851

BELT DRIVEN SINGLE-STAGE COMPRESSORS

- Ideal for professional use, these compressors feature pump which, thanks to their excellent wear resistance, ensures a long life and extremely high reliability.
- Technical features on page 17.
- Available with three phase electric motor for heavy duty and extensive use.

B 255/10/50



Name	Code	Stanley FatMax Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions LxPxA	Ean code
B 255/10/50	28DA404STF024	FMXCM0101E	B2800B	50	2/1,5	2	10/145	YES	1250	255/9	W/50	51/112,4	800x390x750	8016738764079
B 350/10/50	28DA504STF025	FMXCM0102E	B2800B	50	3/2,2	2	10/145	YES	1570	330/11,6	230/50	53/116,8	800x390x750	8016738764086
B 255/10/100	28FA404STF026	FMXCM0103E	B2800B	100	2/1,5	2	10/145	YES	1250	255/9	230/50	67,5/148,8	1025x435x860	8016738764093
B 255/10/100 T	28FA441STF027	FMXCM0104E	B2800B	100	2/1,5	2	10/145	YES	1250	255/9	400/50	68,5/151	1025x435x860	8016738764109
B 350/10/100	28FA504STF028	FMXCM0105E	B2800B	100	3/2,2	2	10/145	YES	1570	330/11,6	230/50	73,5/162	1025x435x860	8016738764116
B 350/10/100 T	28FA541STF029	FMXCM0106E	B2800B	100	3/2,2	2	10/145	YES	1570	330/11,6	400/50	74,5/164,2	1025x435x860	8016738764123
B 400/10/100	36FA504STF030	FMXCM0107E	B3800B	100	3/2,2	2	10/145	YES	1100	390/13,8	230/50	80/176,3	1025x435x925	8016738764130
B 350/10/200	28LA504STF031	FMXCM0108E	B2800B	200	3/2,2	2	10/145	YES	1570	330/11,6	230/50	107,5/237	1435x475x1150	8016738764147
B 350/10/200 T	28LA541STF032	FMXCM0109E	B2800B	200	3/2,2	2	10/145	YES	1570	330/11,6	400/50	108/238	1435x475x1150	8016738764154
B 400/10/200	36LA504STF033	FMXCM0110E	B3800B	200	3/2,2	2	10/145	YES	1100	390/13,8	230/50	113,5/250,2	1435x475x1150	8016738764161
B 400/10/200 T	36LA541STF034	FMXCM0111E	B3800B	200	3/2,2	2	10/145	YES	1100	390/13,8	400/50	114/251,3	1435x475x1150	8016738764178
B 480/10/200 T	36LA601STF035	FMXCM0112E	B3800B	200	4/3	2	10/145	YES	1400	480/16,9	400/50	125/275,5	1435x475x1150	8016738764185
B 480/10/270 T	36NA601STF036	FMXCM0113E	B3800B	270	4/3	2	10/145	YES	1400	480/16,9	400/50	171/377	1640x560x1190	8016738764192

BELT DRIVEN SINGLE-STAGE COMPRESSORS

HIGHLIGHTS

Extremely reliable pump with cast iron cylinder. Wide finned surfaces for a better cooling. Oversized crankcase that guarantees an excellent lubrication.

Solid one-piece handle, fixed and skewed for an easier transportation.



Control panel integrated in the tank structure for a better protection. Oversized manometers placed on the compressor to guarantee an easy reading.

Ergonomic pressure reducer knobs equipped by an innovative "snap" adjustment mechanism.

Oversized strong wheels that ensure high stability and easier transportation.

Double caster wheels.

B 350/10/200



BELT DRIVEN TWO-STAGE COMPRESSORS

HIGHLIGHTS



BELT DRIVEN TWO-STAGE COMPRESSORS



Large intake filter designed to reduce noise.

BA 651/11/270



- Designed for continuous and heavy-duty use, this machine is easy to move thanks to sturdy wheels and comfortable handle.
- Technical features on page 18.



Name	Code	Stanley FatMax Code	Pump	Tank	Power	Cylinder	Max Press.	Lubricated	RPM	Air displacement	Voltage Frequency	Gross weight	Box dimensions	Ean code
				L	Hp/kW	n°	bar/PSI			l/min./CFM	Volt/Hz	kg/lbs	LxPxH	
BA 551/11/200	N4LC601STF037	FMXCM0201E	NB4	200	4/3	2	11/160	YES	1480	480/17	400/50	109/240	1435x475x1150	8016738764208
BA 651/11/200	N5LC701STF038	FMXCM0202E	NB5	200	5,5/4	2	11/160	YES	1480	640/22,6	400/50	124/273,3	1435x475x1150	8016738764215
BA 651/11/270	N5NC701STF039	FMXCM0203E	NB5	270	5,5/4	2	11/160	YES	1480	640/22,6	400/50	142/313	1640x560x1340	8016738764222
BA 701/11/270	N7NC701STF040	FMXCM0204E	NB7	270	5,5/4	2	11/160	YES	950	640/22,6	400/50	172/379	1640x560x1340	8016738764239
BA 851/11/270	N7NC801STF041	FMXCM0205E	NB7	270	7,5/5,5	2	11/160	YES	1250	840/29,7	400/50	177/390,2	1640x560x1340	8016738764246
BA 651/11/500	N5TC701STF042	FMXCM0206E	NB5	500	5,5/4	2	11/160	YES	1480	640/22,6	400/50	246/542,3	2010x650x1330	8016738764253
BA 851/11/500	N7TC801STF043	FMXCM0207E	NB7	500	7,5/5,5	2	11/160	YES	1250	840/29,7	400/50	249/549	2010x650x1330	8016738764260
BA 1251/11/500	N1TC901STF044	FMXCM0208E	NB10	500	10/7,5	2	11/160	YES	1250	1230/43,4	400/50	302/665,7	2010x650x1330	8016738764277

BELT DRIVEN TWO-STAGE COMPRESSORS

BA 651/11/500F



- Powerful compressor with large air reserve make it the perfect work tool for craftsmen and professionals.
- Technical features on page 18.



Delivery pipe designed for a better cooling of the air at tank inlet.



Sturdy feet equipped with anti-vibration.

Name	Code	Stanley FatMax Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions LxPxA	Ean code
BA 651/11/500 F	N5TN701STF045	FMXCM0209E	NB5	500	5,5/4	2	11/160	YES	1480	640/22,6	400/50	241/531,3	2010x650x1330	8016738764284
BA 651/11/500 F SD	N5TN705STF046	FMXCM0210E	NB5	500	5,5/4	2	11/160	YES	1480	640/22,6	400/50	222/489,4	2070x600x1150	8016738764291
BA 851/11/500 F	N7TN801STF047	FMXCM0211E	NB7	500	7,5/5,5	2	11/160	YES	1250	840/29,7	400/50	244/538	2010x650x1330	8016738764307
BA 851/11/500 F SD	N7TN805STF048	FMXCM0212E	NB7	500	7,5/5,5	2	11/160	YES	1250	840/29,7	400/50	231/509,2	2070x600x1150	8016738764314
BA 1251/11/500 F	N1TN901STF049	FMXCM0213E	NB10	500	10/7,5	2	11/160	YES	1250	1230/43,4	400/50	297/654,8	2010x650x1330	8016738764321
BA 1251/11/500 F SD	N1TN905STF050	FMXCM0214E	NB10	500	10/7,5	2	11/160	YES	1250	1230/43,4	400/50	302/665,8	2010x650x1330	8016738764338
BA 1402/11/500	N7UN701STF051	FMXCM0215E	NB7	500	5,5/4+5,5/4	2	11/160	YES	950	640/22,6+640/22,6	400/50	303/667	2080x700x1450	8016738764345

WARRANTY

1. All FNA air tools and accessories are covered by warranty for a period of twelve months from the invoice date.

The warranty is valid only if the buyer has fully paid for the machine and the machine is running on a normal suitable environment and correctly installed. Excluded from the warranty are all electric components and all the wear and tear. The warranty makes FNA responsible to support the costs of repairing or replacing all parts that are defective according to their engineers, as long as these defects are due to manufacturing problems or quality of the materials (which are the manufactures responsibility) and are not dependant on normal wear and tear or negligence of the operator or improper use of the product.

Also if the product was not used accordingly to the instructions or wholly or partly dismantled or repaired by unauthorized people or by excessive usage of the machine or unsuitable applications or due to force major.

All the compressors with tank up to 100 must be returned to the repair centre at the customer's cost and will be delivered including carriage. The warranty considered is applied under law.

2. These Conditions of sale shall be considered applicable to any supply contract (or agreement for sale) concerning the FNA products unless otherwise expressly specified in writing and accepted. These conditions of sale are not binding and may be subject to change without prior notice. All supplies are understood to be accepted at prices included in the official FNA price list that is effective when the goods are despatched even if these are delivered late in comparison to the scheduled delivery date. Prices, discounts and conditions of single supplies are not binding for following orders. The orders collected by agents representatives on people entitled by FNA S.p.A are submitted to its unquestionable judgment; therefore any order must not be considered as accepted until the company has issued an order confirmation.

All deliveries of the goods are always priced ex works FNA's factory Torino.

Packaging in cardboard boxes is included in the price: Packaging in cases or wooden boxes will be charged at cost.

The customer can not cancel orders accepted by the company without the consent in writing. Orders concerning goods already shipped can never be cancelled.

3. The company engages itself to respect the stated delivery times, but it is not responsible for delays due - for example - to difficulties or problems in procurements and in transport suspensions or in energy supplies, breakdowns failure of machinery, strikes and any other cause that limit the company production.

The delivery delays shall not entitle the purchaser to claim for Consequential loss or damages nor to cancel or reduce the order or solve the contract. Delivery terms are never binding.

4. Goods always travel at risk and peril of the purchaser even if the delivery is free of charge. The claims for delays or damages due to the transport must go only to the forwarding agent when goods are delivered.

The purchaser must check the goods immediately after having received them: After 8 days from the arrival to the recipient goods shall be Considered as accepted. The eventual claims concerning the quality of goods must be sent in writing by registered mail addressed to FNA S.p.A. within 8 days from the date

of receiving. For operating flaws, visible only by using the product, the claim terms become 30 days from the date of receiving the goods.

If FNA S.p.A. accepts (in writing) the claim (if the claim is considered valid,) it has to only replace the goods carriage free, without any other penalty or indemnity.

The company cannot accept any responsibility for any damage to persons or things caused by the use of its products.

5. Changes to products, technical data specifications and photographs indicated in this catalogue/ price list or any other informative material are not binding and may be subject to change without prior notice.

6. Compressors installation, electrical and hydraulic connections are at the customer's cost.

7. The eventual intervention executed by FNA's technical personnel for the first starting testing will be invoiced separately.

8. All compressors in the present catalogue/ price list are equipped by tanks are manufactured according to CE regulations.

9. The purchaser must respect the terms of payment as stated on the company's invoice and addressed to FNA S.p.A head office and indicated in the invoice, or paid to the courier in case of cash on delivery.

10. For no reason and under no authority, not even in case of faulty products for which has been presented a claim, the purchaser should consider itself eligible to postpone the payment deadline. Delays in payments shall result in application of penalty interests according to current bank interest rates until payment is received and the company retains the legal ownership of the goods delivered. Deductions, bonuses, deductions, up/down rounding, greater discounts compare to what was agreed upon, constitute agreement non-fulfilment by the purchaser.

In case of agreement non-fulfilment FNA S.p.A reserve itself the right to perform any other action, demand anticipated payment of the remaining credits and to consider over any ongoing agreement relation and suspend its execution while the purchaser can not demand reimbursements and indemnity.

11. The court of Torino shall have exclusive jurisdiction over any disputes relating to the terms and conditions mentioned above.

Under and for the effects of articles 1341 and 1342 Italian Civil Code the following clauses are subjected to express written approval:

1. (warranty of adequate functioning);

3. (limitation of the responsibility for delays);

4. (delays or damages caused by transportation - terms for the claim of the purchaser - limitation of responsibility after claim of the purchaser - immunity for damages to persons or things);

10. (prohibition of payments postponement - anticipated payment - resolution clause - limitation of responsibility deductions, bonuses, deductions, up/down rounding, greater discounts compare to what was agreed upon);

11. (exclusive jurisdiction).



STANLEY, The STANLEY Logo, The Notched Rectangle and the Yellow and Black Diagonal Package Design are all trademarks of Stanley Black & Decker, Inc or an affiliate thereof and are used under license.

Manufactured under license by:

FNA S.p.A.
via Einaudi 6,
10070 Robassomero (TO) Italy
Tel. +39 011 92 33 000
Fax +39 011 92 41 138
info@fnacompressors.com
www.fnacompressors.com

Distributed by:

FNA, is an industrial company with over 65 years of experience in the compressed air, today represents the largest manufacturer of piston compressors in the world. FINI NUAIR makes its mark on the market thanks to its dynamism and technological innovation. Know-how, creativity, integrated marketing activities, flexible production processes, quality and 'tailor-made' customer service are the strong points of **FNA** which avails itself, in Europe, of a highly experienced and qualified managers team, able to interpret the needs of the market and clients in relation to product definition, development and distribution.